RNAV (GPS) RWY 5

JONESBORO MUNI (JBR)

WAAS	APP CRS	Rwy Idg	6200
CH 77820	050°	TDZE	259
W05A		Apt Elev	262

RNP APCH.

T A Circling Rwy 31 NA at night. Baro-VNAV and VDP NA when using Walnut Ridge altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. Circling NA northwest of Rwy 5-23. Rwy 5 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Walnut Ridge altimeter setting: increase LPV DA to 593 feet and visibility ⅛ SM, and LNAV/VNAV DA to 669 feet; increase all MDAs 60 feet and visibility LNAV Cat C/D ¼ SM and Circling Cat C ⅛ SM.

MISSED APPROACH: Climb to 2200 direct PUKKO and hold.

ASOS	MEMPHIS CENTER	UNICOM
118.525	120.075 289.4	123.0 (CTAF) L

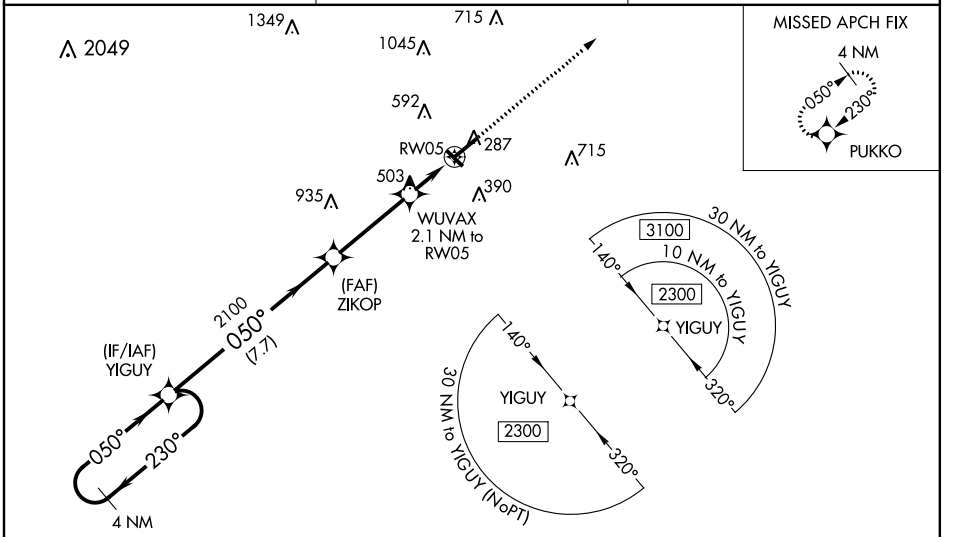

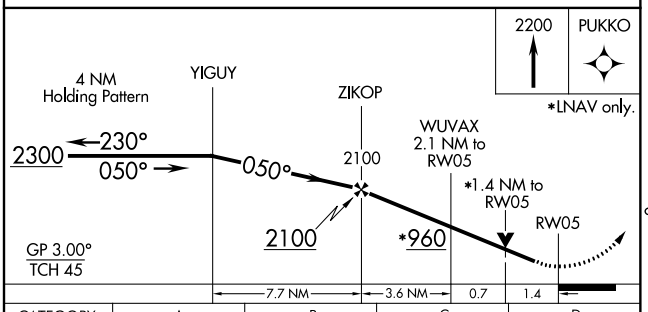

CATEGORY	A	B	C	D
LPV DA	539-⅞ 280 (300-⅞)			
LNAV/VNAV DA	615-1⅛ 356 (400-1⅛)			
LNAV MDA	760-1 501 (500-1)		760-1⅜ 501 (500-1⅜)	
CIRCLING	760-1 498 (500-1)		760-1½ 498 (500-1½)	820-2 558 (600-2)

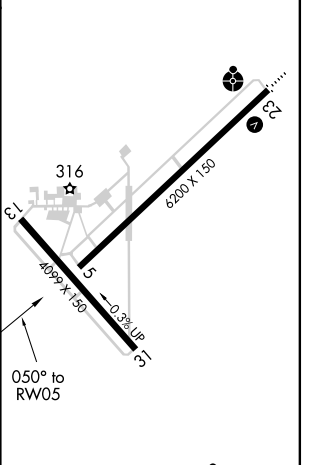

MIRL Rwys 5-23 and 13-31 L

SC-1, 25 FEB 2021 to 25 MAR 2021
SC-1, 25 FEB 2021 to 25 MAR 2021