

VOR/DME FCM <b>117.7</b> Chan 124	APP CRS <b>100°</b>	Rwy Idg TDZE Apt Elev	<b>5000</b> <b>905</b> <b>906</b>
---	------------------------	-----------------------------	---

# VOR RWY 10R


FLYING CLOUD (FCM)

**⚠** When local altimeter setting not received, use Minneapolis St-Paul/Wald-Chamberlain altimeter setting and increase all MDA 40 feet, HIVAT fix minimums: Increase S-10R Cat C visibility ¼ mile. For inoperative MALS/R, HIVAT fix minimums: Increase S-10R Cat D visibility to 1 ¼ mile. VDP NA when using Minneapolis St-Paul/Wald-Chamberlain altimeter setting. Night Landing: Rwy 18/36 NA.




**MISSED APPROACH:** Climb to 1800 then climbing right turn to 2700 direct FCM VOR/DME and hold, continue climb-in-hold to 2700.

ATIS <b>124.9</b>	MINNEAPOLIS APP CON <b>134.7 284.7</b>	FLYING CLOUD TOWER * <b>119.15 (CTAF)</b>	GND CON <b>121.7</b>	CLNC DEL <b>121.7</b> (When twr closed)	UNICOM <b>122.95</b>
----------------------	---	--	-------------------------	---	-------------------------

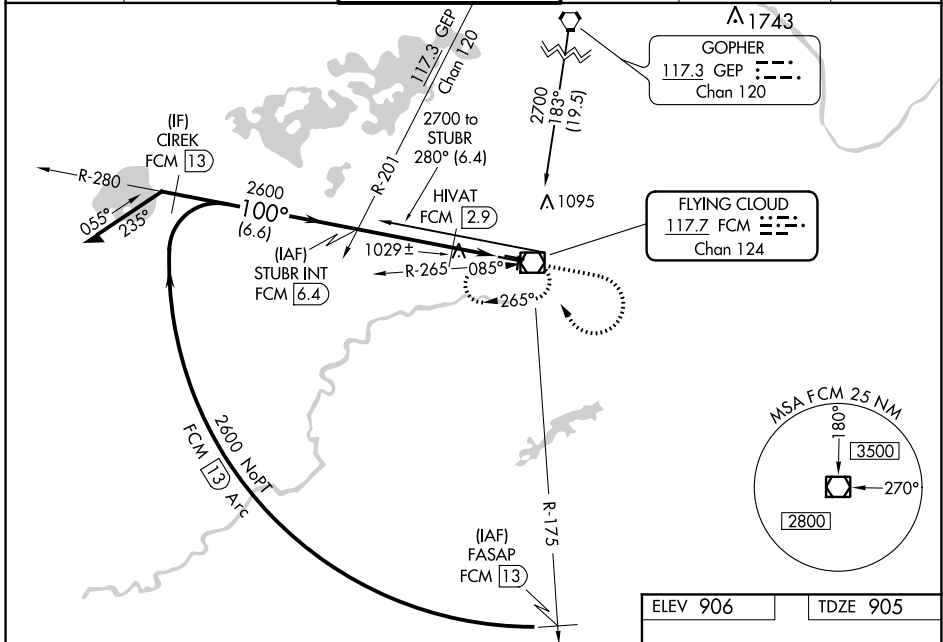


NC-1, 25 FEB 2021 to 25 MAR 2021

NC-1, 25 FEB 2021 to 25 MAR 2021

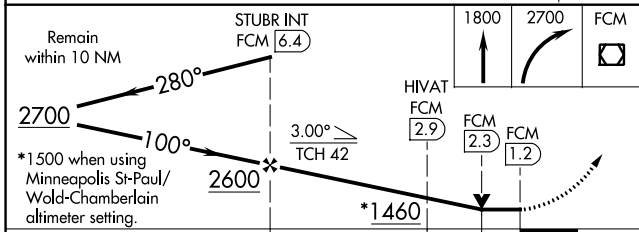

ELEV 906	TDZE 905
----------	----------



CATEGORY	A	B	C	D
S-10R	1460-½	555 (600-½)	1460-1	1460-1¼
<b>C</b> CIRCLING	1460-1	554 (600-1)	1460-1½	1540-2
HIVAT FIX MINIMUMS				
S-10R	1280-½	375 (400-½)	1280-1	375 (400-1)
<b>C</b> CIRCLING	1320-1	1440-1	1440-1½	1540-2
	414 (500-1)	534 (600-1)	534 (600-1½)	634 (700-2)

HIRL Rwy 10R-28L **Ⓛ**  
 REIL Rwy 10L, 28R  
 REIL Rwy 18, 28L, and 36 **Ⓛ**  
 MIRL Rwy 10L-28R and 18-36 **Ⓛ**

FAF to MAP 5.2 NM

Knots	60	90	120	150	180
Min:Sec	5:12	3:28	2:36	2:05	1:44