RNAV (GPS) RWY 9

GRATIOT COMMUNITY (AMN)

WAAS	APP CRS	Rwy Idg	5004
CH 90228	095°	TDZE	753
W09A		Apt Elev	754

RNP APCH.

Baro-VNAV NA when using Mount Pleasant altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 39°C. Rwy 9 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Mount Pleasant altimeter setting and increase all DA 42 feet and VNAV all Cats visibility ⅛ mile, increase all MDA 60 feet, and LNAV Cat C and D visibility ¼ mile. VDP NA when using Mount Pleasant altimeter setting.

MISSED APPROACH: Climb to 2600 direct CEGEE and hold.

AWOS-3	GREAT LAKES APP CON*	CLNC DEL	UNICOM
124.175	126.45 235.625	119.25	122.8 (CTAF) L

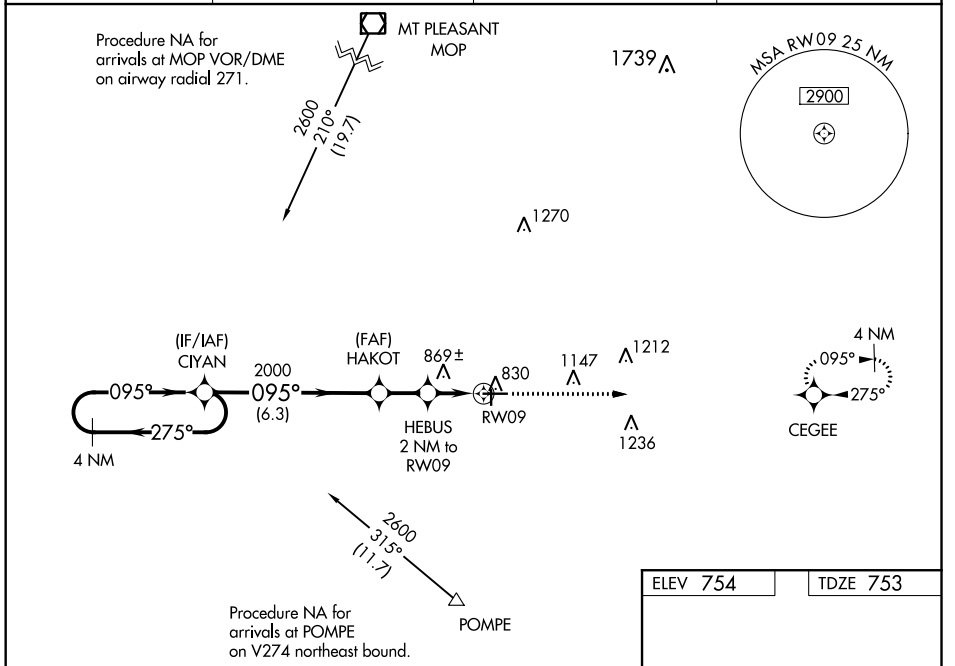

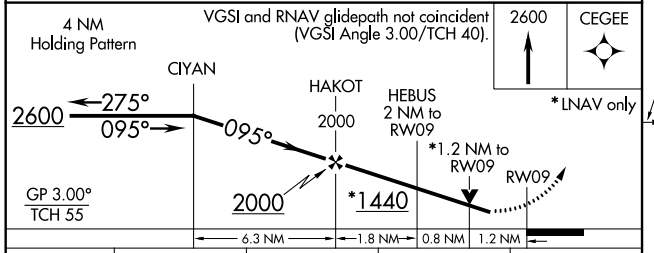

CATEGORY	A	B	C	D
LPV DA	1028-1 275 (300-1)			
LNAV/VNAV DA	1156-1⅜ 403 (500-1⅜)			
LNAV MDA	1160-1 407 (500-1)		1160-1⅛ 407 (500-1⅛)	

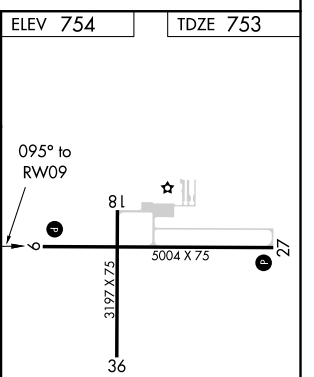

EC-1, 25 FEB 2021 to 25 MAR 2021
EC-1, 25 FEB 2021 to 25 MAR 2021