ILS or LOC RWY 17R

DENVER INTL (DEN)

LOC/DME I-ACX	APP CRS	Rwy Idg	12000
108.5	173°	TDZE	5392
Chan 22		Apt Elev	5434

DME or RADAR required for LOC only.
RNAV 1-GPS or RADAR required for procedure entry.

Simultaneous approach authorized. For inop ALS, increase S-17R LOC Cat C/D visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 10000 on heading 173° and on FQF VORTAC R-197 to HOHUM INT/ FQF 22.5 DME and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON	CLNC DEL	CPDLC
ARR 125.6 379.9 DEP 134.025	119.3 307.3 120.35 379.3 (NORTH) (SOUTH)	133.3 322.45	121.85 377.1	118.75	

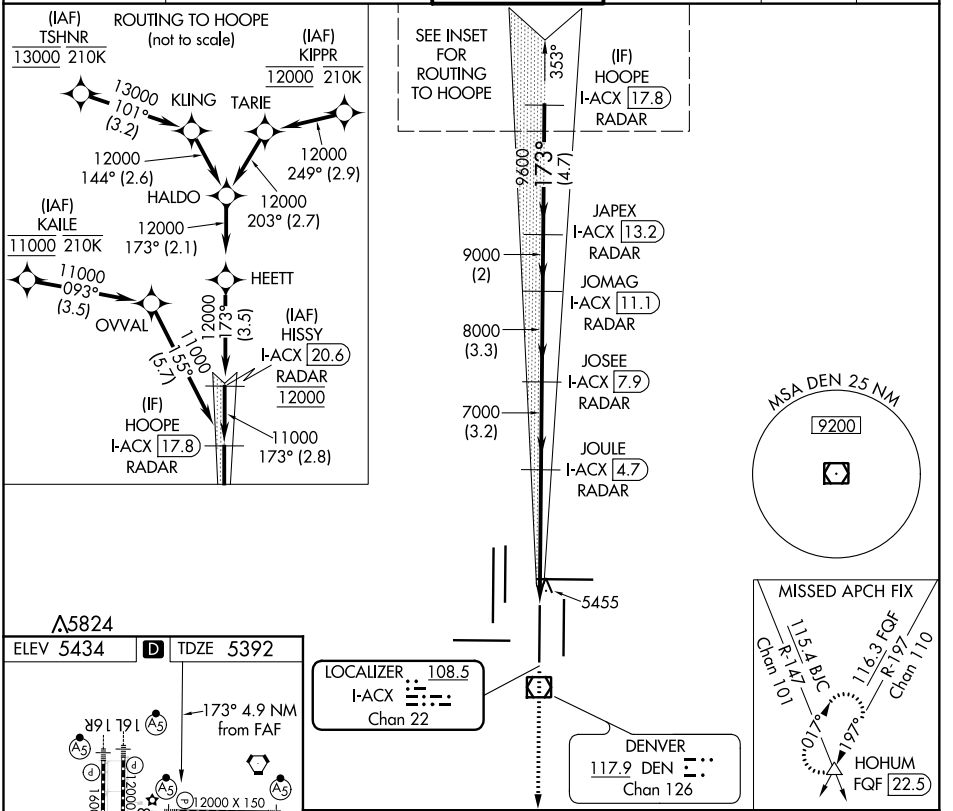



TDZ/CL Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R
HIRL all Rwys

FAF to MAP 4.9 NM					
Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38

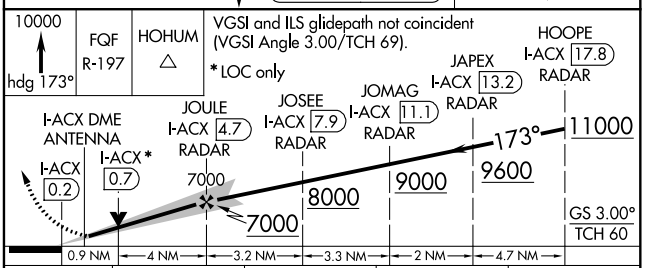

CATEGORY	A	B	C	D
S-ILS 17R	5592/18 200 (200-½)			
S-LOC 17R	5720/24 328 (300-½)		5720/30 328 (300-⅝)	

SW-1, 25 FEB 2021 to 25 MAR 2021
SW-1, 25 FEB 2021 to 25 MAR 2021