RNAV (GPS) RWY 32

BEDFORD COUNTY (HMZ)

WAAS	APP CRS	Rwy Idg	5005
CH 90437	317°	TDZE	1162
W32A		Apt Elev	1162

DME/DME RNP-0.3 NA. VDP NA when using Altoona altimeter setting. When local altimeter setting not received, use Altoona altimeter setting and increase all MDA 100 feet. Increase LP Cat C visibility ¼ mile. Increase LNAV Cat B visibility ¼ mile and Cat C visibility ½ mile. Increase Circling Cats A and B visibility ¼ mile. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 5000 direct ZAGOX and on track 359° to YEDUS and hold, continue climb-in-hold to 5000.

AWOS-3	JOHNSTOWN APP CON ★	UNICOM
123.675	121.2 299.2	122.7 (CTAF) L

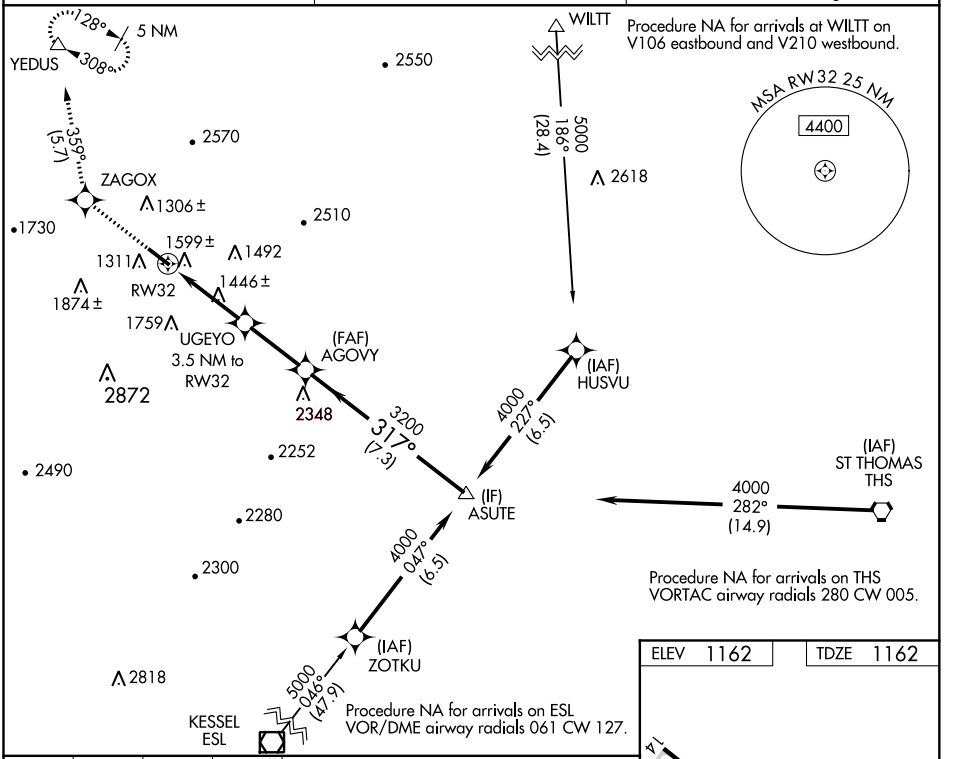

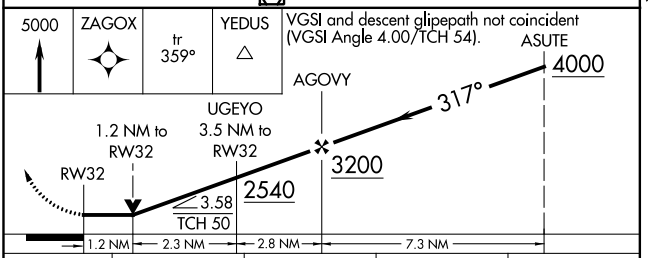

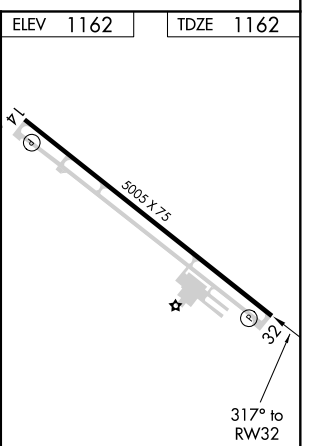

CATEGORY	A	B	C	D
LP MDA	1740-1 578 (600-1)		1740-1⅝ 578 (600-1⅝)	NA
LNAV MDA	1860-1 698 (700-1)		1860-2 698 (700-2)	NA
C CIRCLING	1900-1 738 (800-1)	1960-1 798 (800-1)	2200-3 1038 (1100-3)	NA

REIL Rwys 14 and 32 L
MIRL Rwy 14-32 L

NE-4, 25 FEB 2021 to 25 MAR 2021
NE-4, 25 FEB 2021 to 25 MAR 2021