

WAAS CH 49119 W19B	APP CRS 196°	Rwy Idg TDZE Apt Elev	7301 1320 1333
--	------------------------	-----------------------------	---

RNAV (GPS) Y RWY 19L

WICHITA DWIGHT D EISENHOWER NATIONAL (ICT)


RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Simultaneous approach authorized with ILS or LOC RWY 19R. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations.




MISSED APPROACH:
Climb to 3600 direct
YELOO and hold.

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6	CLNC DEL 125.7
-----------------------	---------------------------------------	-------------------------------------	-------------------------------	--------------------------

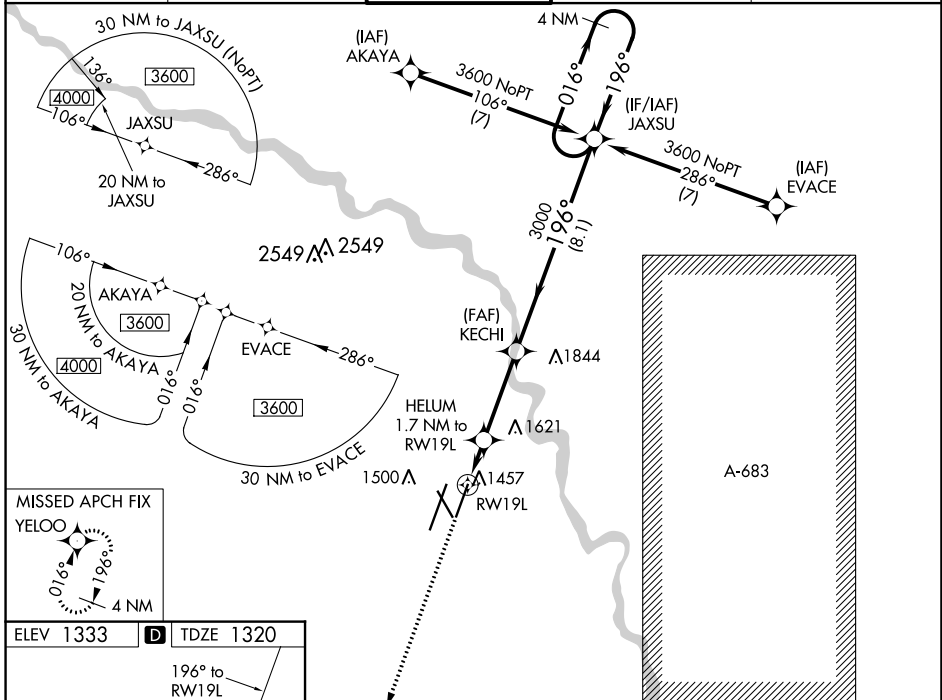

ELEV 1333	D	TDZE 1320
-----------	----------	-----------

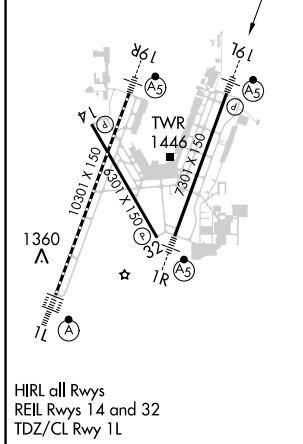

3600	YELOO	HELM 1.7 NM to RWY 19L	KECHI	JAXSU	4 NM Holding Pattern
*LNAV only.		*1.1 NM to RWY 19L	3000	196°	3600
1900*		196°	3000	196°	GP 3.00° TCH 54
1.1 NM	0.6	3.4 NM	8.1 NM		
CATEGORY	A	B	C	D	
LPV DA	1520-½		200 (200-½)		
LNAV/VNAV DA	1747-¾		427 (500-¾)		
LNAV MDA	1780-½	460 (500-½)	1780-⅞	460 (500-⅞)	
C CIRCLING	1800-1	467 (500-1)	1980-1¾	1980-2	647 (700-2)

NC-2, 25 FEB 2021 to 25 MAR 2021

NC-2, 25 FEB 2021 to 25 MAR 2021