ILS or LOC RWY 4R

JOHN F KENNEDY INTL (JFK)

LOC/DME I-JFK	APP CRS	Rwy ldg 8400
109.5 Chan 32	044°	TDZE 12
		Apt Elev 13

RADAR required for procedure entry.

Simultaneous approach authorized.

ALSF-2

MISSED APPROACH: Climb to 800 then climbing right turn to 4000 heading 099° and V44 to DPK VOR/DME and hold.

D-ATIS (ARR/DEP)	(ARR-NE)	(ARR-SW)	NEW YORK APP CON		KENNEDY TOWER		GND CON	CLNC DEL	CPDLC
128.725	117.7	115.4	128.125	269.0	Rwys 4R/22L and 13L/31R 119.1	281.55	121.9	135.05	
					Rwys 4L/22R and 13R/31L 123.9	281.55	348.6	348.6	

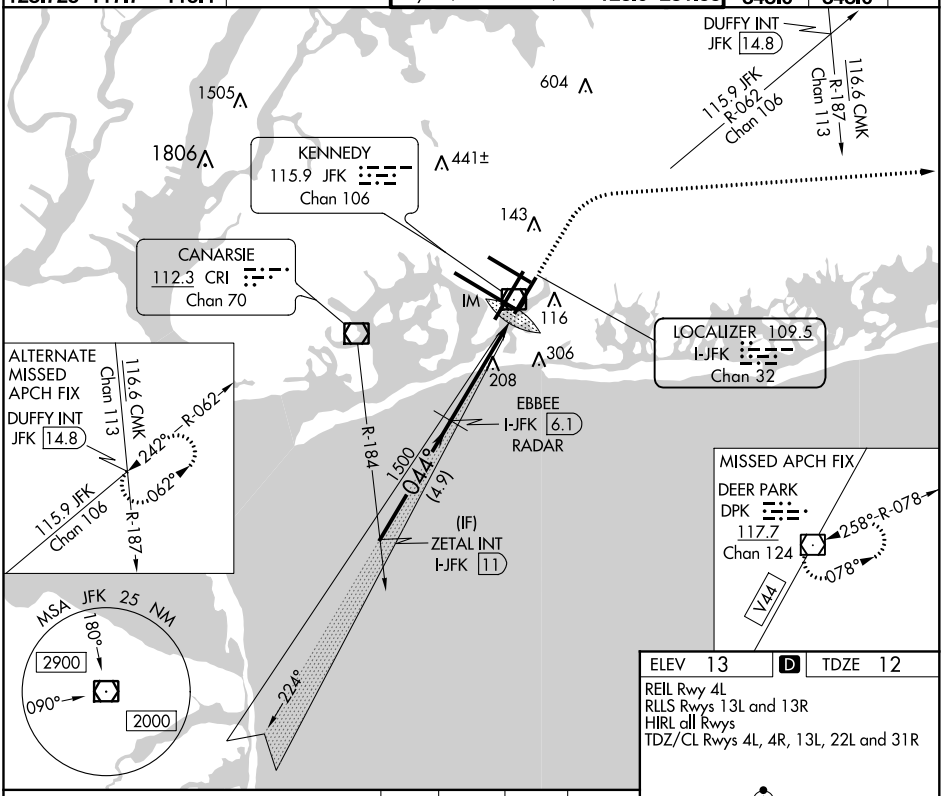

ELEV 13 D TDZE 12

REIL Rwy 4L
RLLS Rwys 13L and 13R
HIRL all Rwys
TDZ/CL Rwys 4L, 4R, 13L, 22L and 31R

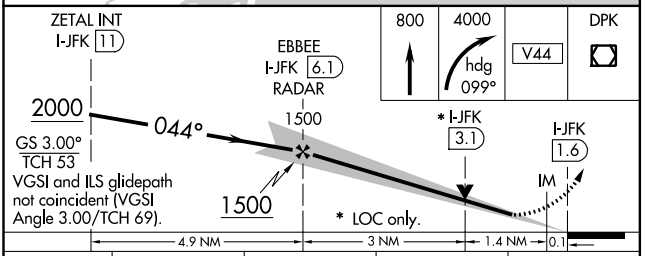



CATEGORY	A	B	C	D
S-ILS 4R	212/18		200 (200-½)	
S-LOC 4R	540/24	528 (600-½)	540/55	528 (600-1)
C CIRCLING	640-1	627 (700-1)	680-1¾ 667 (700-1¾)	680-2 667 (700-2)

FAF to MAP 4.5 NM

Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

NE-2, 25 FEB 2021 to 25 MAR 2021
NE-2, 25 FEB 2021 to 25 MAR 2021