WAAS	APP CRS		
CH 42511 W21A	205°	Rwy Idg	6101
		TDZE	475
		Apt Elev	483

RNAV (GPS) RWY 21L

CINCINNATI MUNI AIRPORT LUNKEN FIELD (LUK)

RNP APCH.

Circling NA for Cat D north of Rwy 7 and northwest of Rwy 21R. Circling Rwy 3L, 7, 21R NA at night. Rwy 21L helicopter visibility reduction below ¾SM NA. Inop table does not apply to LNAV/VNAV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV all Cats visibility to RVR 4500, LNAV Cats A/B visibility to RVR 5500 and LNAV Cats C/D visibility to 2 SM.

MALSR

MISSED APPROACH: Climb to 2500 direct WONAN and on track 130° to CALIF and hold, continue climb-in-hold to 2600.

ATIS	CINCINNATI APP CON	LUNKEN TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
120.25	121.0 254.25	118.7 (CTAF) L 257.8	121.9	121.9	124.9 (when twr closed)	122.95

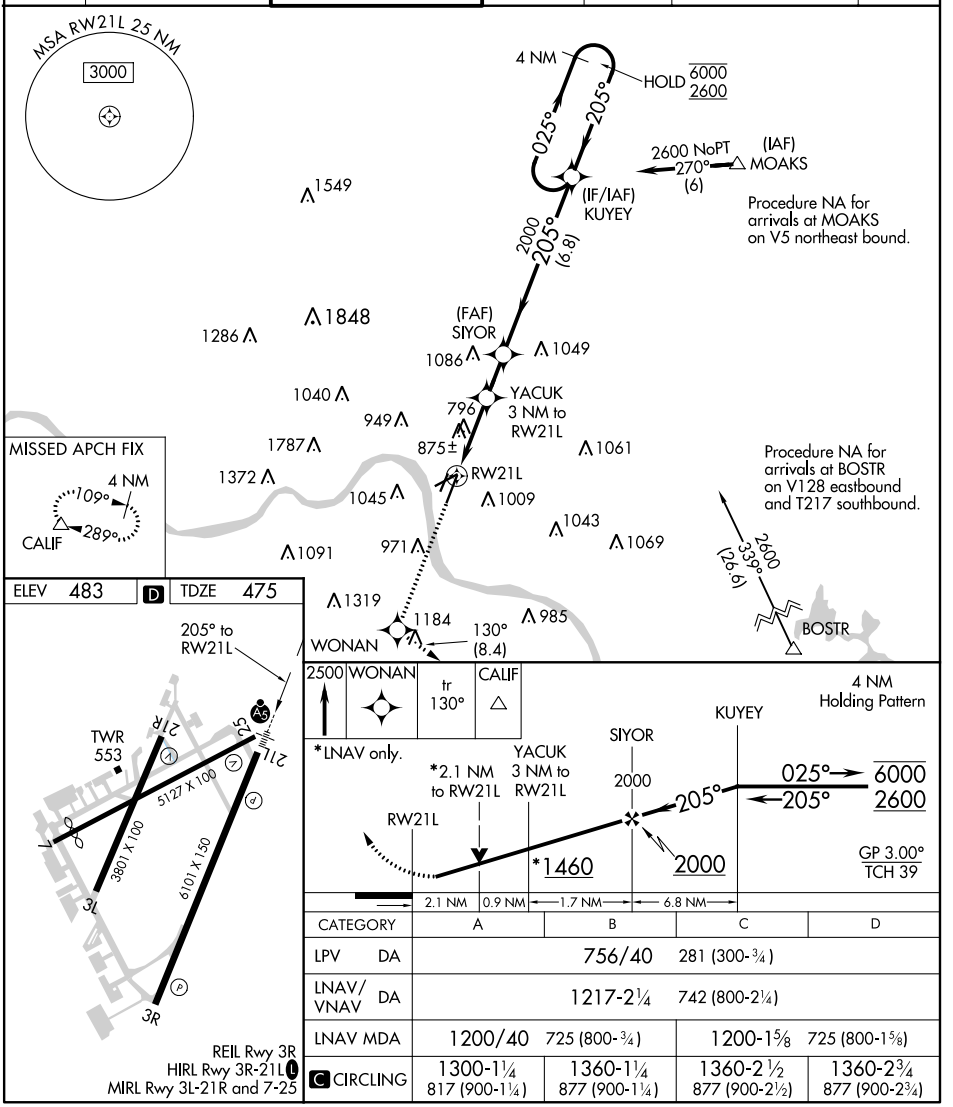

CATEGORY		A	B	C	D
LPV	DA	756/40	281 (300-¾)		
LNAV/VNAV	DA	1217-2¼	742 (800-2¼)		
LNAV MDA		1200/40	725 (800-¾)	1200-1⅝	725 (800-1⅝)
C CIRCLING		1300-1¼ 817 (900-1¼)	1360-1¼ 877 (900-1¼)	1360-2½ 877 (900-2½)	1360-2¾ 877 (900-2¾)

EC-2, 25 FEB 2021 to 25 MAR 2021
EC-2, 25 FEB 2021 to 25 MAR 2021