

WAAS CH 72631 W35A	APP CRS 354°	Rwy Idg 4444 TDZE 324 Apt Elev 325
--	------------------------	---

RNAV (GPS) RWY 35


BRUCE CAMPBELL FIELD (MBO)

RNP APCH.



Baro-VNAV and VDP NA when using Jackson-Medgar Wiley Evers Intl altimeter setting.
 Rwy 35 helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Jackson-Medgar Wiley Evers Intl altimeter setting and increase all DA 21 feet and visibility 1/8 SM, increase all MDA 40 feet and Circling Cat C/D visibility 1/4 SM.

MISSED APPROACH: Climb to 2400 direct DUHAB and hold.

AWOS-3PT 119.125	JACKSON APP CON ★ 123.9 317.7	CLNC DEL 125.9	UNICOM 122.8 (CTAF) 0
----------------------------	---	--------------------------	---------------------------------

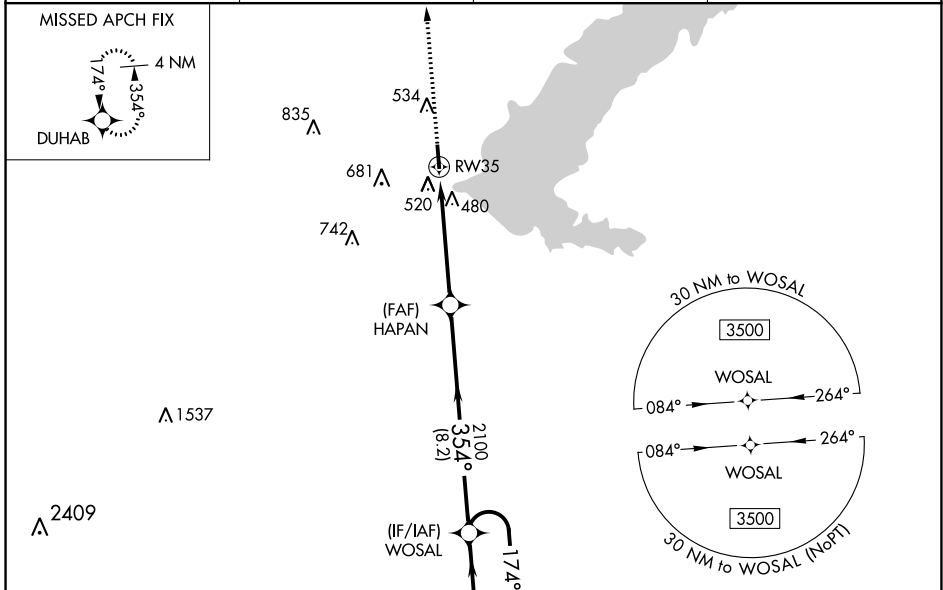

ELEV 325	TDZE 324
----------	----------

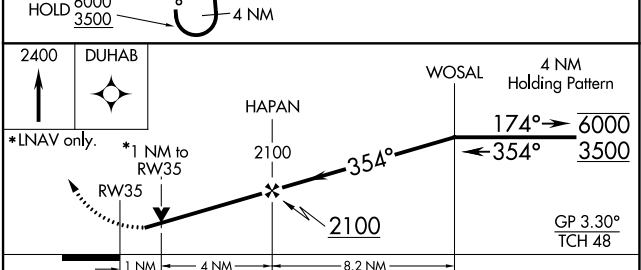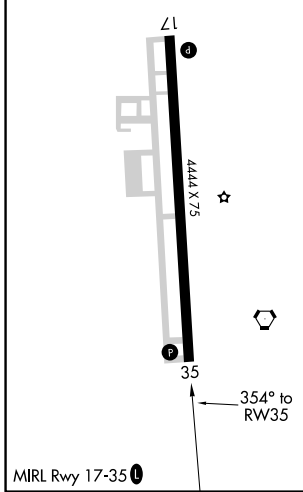

CATEGORY	A	B	C	D
LPV DA		643-7/8	319 (400-7/8)	
LNAV/VNAV DA		750-1/4	426 (500-1/4)	
LNAV MDA	780-1	456 (500-1)	780-1 3/8	456 (500-1 3/8)
CIRCLING	820-1 495 (500-1)	840-1 515 (600-1)	1040-2 715 (800-2)	1040-2 1/4 715 (800-2 1/4)

SC-4, 25 FEB 2021 to 25 MAR 2021

SC-4, 25 FEB 2021 to 25 MAR 2021